

Specifications

Model :	HBA6-100	HBA6-150	HBA8-100	HBA8-150	HBA4-100	HBA4-150	HBA5-100	HBA5-150
Power(W)	100W	150W	100W	150W	100W	150W	100W	150W
Base	／	／	／	／	E39/E40	E39/E40	E39/E40	E39/E40
Driver	Philips	Philips	Driverless LED high bay light	Driverless LED high bay light	MW/Philips	MW/Philips	Driverless LED high bay light	Driverless LED high bay light
Input Voltage	AC85—277V	AC85—277V	AC 200-240V	AC 200-240V	AC85—277V	AC85—277V	AC 200-240V	AC 200-240V
luminous efficiency	130Lm/W ,150L/W	130Lm/W ,150L/W	90Lm/W	90Lm/W	130Lm/W ,150L/W	130Lm/W ,150L/W	90Lm/W	90Lm/W
CCT	2700K-7000K	2700K-7000K	2700K-7000K	2700K-7000K	2700K-7000K	2700K-7000K	2700K-7000K	2700K-7000K
CRI	CRI>70 ,CRI>80	CRI>70 ,CRI>80	CRI>70 ,CRI>80	CRI>70 ,CRI>80	CRI>70 ,CRI>80	CRI>70 ,CRI>80	CRI>70 ,CRI>80	CRI>70 ,CRI>80
LED	LUMILEDS-2835 /3030	LUMILEDS-2835 /3030	LUMILEDS-2835 /3030	LUMILEDS-2835 /3030	LUMILEDS-2835 /3030	LUMILEDS-2835 /3030	LUMILEDS-2835 /3030	LUMILEDS-2835 /3030
PF	>0.95	>0.95	>0.95	>0.95	>0.95	>0.95	>0.95	>0.95
LED Lifespan	50000H	50000H	50000H	50000H	50000H	50000H	50000H	50000H
Beam Angle	60°/90°/120°	60°/90°/120°	60°/90°/120°	60°/90°/120°	60°/90°/120°	60°/90°/120°	60°/90°/120°	60°/90°/120°
Operating Temp.	-40C ~ +50C	-40C ~ +50C	-40C ~ +50C	-40C ~ +50C	-40C ~ +50C	-40C ~ +50C	-40C ~ +50C	-40C ~ +50C
Material	Aluminum + PC	Aluminum + PC	Aluminum + PC	Aluminum + PC	Aluminum + PC	Aluminum + PC	Aluminum + PC	Aluminum + PC
IP Rating	IP65	IP65	IP65	IP65	IP65	IP65	IP65	IP65
Warranty	5 years	5 years	3 years	3 years	5 years	5 years	3 years	3 years
Product Size(mm)	278 X 278 X 310	278 X 278 X 310	278 X 278 X 155	278 X 278 X 155	278 X 278 X 300	278 X 278 X 300	278 X 278 X 300	278 X 278 X 300

Packing

Packing	L320 x W320 x H230	L320 x W320 x H230	L320 x W320 x H140	L320 x W320 x H140	L320 x W320 x H240	L320 x W320 x H240	L320 x W320 x H240	L320 x W320 x H240
N.W	2.6KG	2.6KG	1.6KG	1.6KG	2.5KG	2.5KG	1.5KG	1.5KG
G.W	3.6KG	3.6KG	2.6KG	2.6KG	3.5KG	3.5KG	2.5KG	2.5KG
20GP	1260PCS	1260PCS	2142PCS	2142PCS	1176PCS	1176PCS	1176PCS	1176PCS
40GP	2560PCS	2560PCS	4400PCS	4400PCS	2400PCS	2400PCS	2400PCS	2400PCS
40HP	2900PCS	2900PCS	4900PCS	4900PCS	2800PCS	2800PCS	2800PCS	2800PCS

Cooperative Brand:   

For more information, please contact us.

Shenzhen AUGE Lighting Co., Ltd

2F Building 22, Xinde Industrial Park, Citianpu,
Guangming New District, Shenzhen,
Guangdong, China.

TEL: +86-755-81733758/32910423
FAX: +86-755-81738190
info@auge-led.com.
Www.auge-led.com

AUGE International Group (Asia) Co., Limited

ADD: Room 603E, 2C6 / F, Hang Pont Commercial
Building, 31 Tonkin Street, Cheung Shawan,
Kowloon, Hong Kong



www. auge-led. com

AUGE



UFO Bulb Light

2017-2018 New Products



Workshop



Warehouse




Workshop





Factory

A series UFO


HBA4 : (Mean Well/Philips driver)

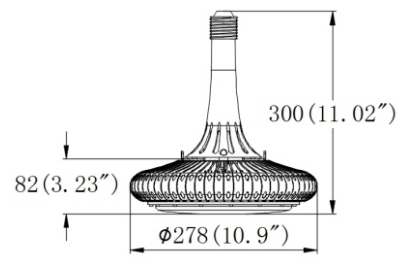


PRODUCT DETAILS

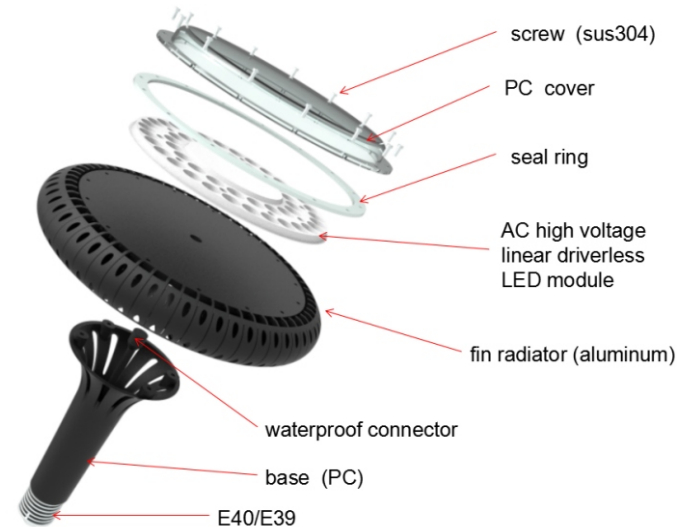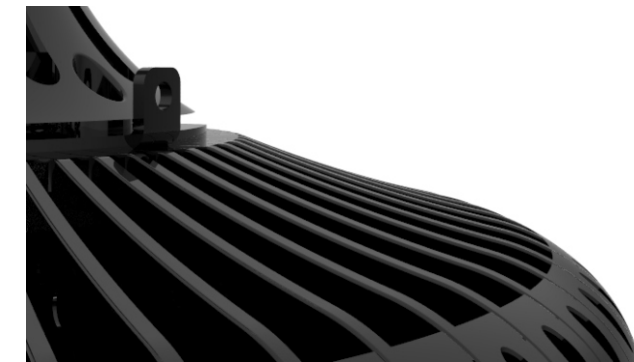



HA5: (high voltage linear driverless)

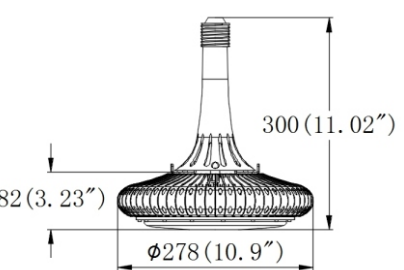

HBA6: (Philips driver)



HBA8: (AC high voltage linear driverless)

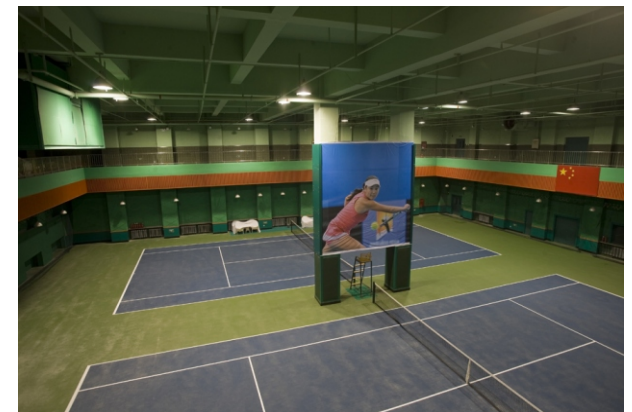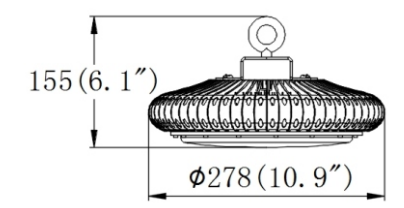

Replacement installation instructions

AUGE



MHL/HPS/CFL/CORN LAMP




HBA4 / A5 / A6 / A8 100W

300W MHL / HPS / CFL

HBA4 / A5 / A6 / A8 150W

500W MHL / HPS / CFL

Replace CFL

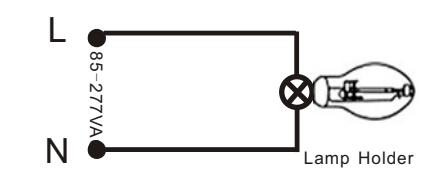

Replace MHL/HPS

